

Cup & Bottle Assemblies

INSTRUCTIONS AND REPLACEMENT PARTS

Screw Cover Siphon Jar Assemblies:

Jar Assemblies are used for quick change of colors on jobs where materials are used in small quantities. Paasche offers containers of many sizes for a wide variety of uses.

- AU, AUT & A-JU Spray Guns have 1/4" Fluid Connection.
- BU, CU, D2U, 211 & 300 have 3/8" Fluid Connections.

AU & AUT SPRAY GUNS with 1/4" Fluid Inlet:

40SCJ QUART SIPHON JAR ASSEMBLY— 32 oz. (.946 l)

No.	Part Number	Description
1.	UA-2398-9-1/8"	Tube Assembly
2.	UB-1538	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	40J	Quart Jar

41SCJ PINT SIPHON JAR ASSEMBLY— 16 oz. (.473 l)


1.	UA-2398-7-1/4"	Tube Assembly
2.	UB-1538	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	41J	Pint Jar

42SCJ HALF PINT SIPHON JAR ASSEMBLY— 8 oz. (.237 l)

1.	UA-2398-5-3/4"	Tube Assembly
2.	UB-1538	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	42J	Half Pint Jar

43SCJ 3 OUNCE SIPHON JAR ASSEMBLY—3 oz. (88cc)

10.	U-3231	Tube & Neck Assembly
10A.	N-1/4"	Nut Plated
11.	U-3226	Locknut (2)
12.	U-3389	Flange (2)
13.	U-3390-1	Cover
14.	3-JG	Gasket
15.	H-108	3 Ounce Jar

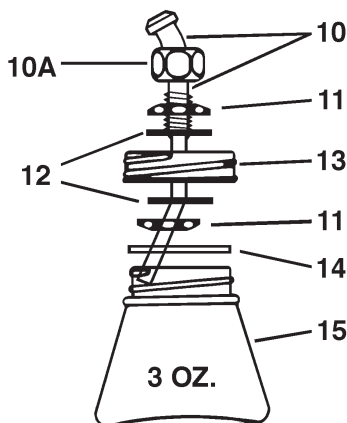

BU, CU, D2U, 211 & 300 SPRAY GUNS with 3/8" Fluid Inlet:

44SCJ QUART SIPHON JAR ASSEMBLY— 32 oz. (.946 l)



No.	Part Number	Description
1.	U-992-9"	Tube Assembly
2.	UB-1538	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	40J	Quart Jar

45SCJ PINT SIPHON JAR ASSEMBLY— 16 oz. (.473 l)

1.	U-992-7	1/8" Tube Assembly
2.	UB-1538	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	41J	Pint Jar

47SCJ 6 OUNCE SIPHON JAR ASSEMBLY— 6 oz. (.177 l)

20.	U-992-4	5/8" Tube Assembly
21.	DB-46	6 Ounce Cover
22.	DB-47	Stiffener
23.	U-879	Locknut
24.	6-JG	Gasket
25.	47J	6 Ounce Jar

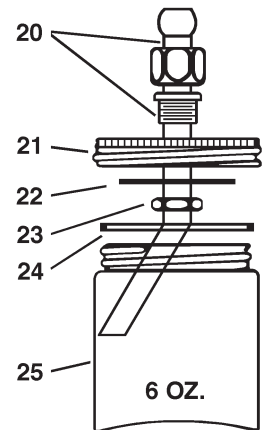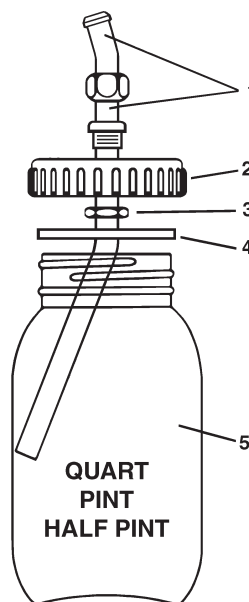

Paasche Airbrush Company

4311 North Normandy
Chicago, IL 60634-1395

Phone: 773-867-9191 • Fax: 773-867-9198

Website: paascheairbrush.com

E-Mail: info@paascheairbrush.com

PAASCHE Siphon and Gravity–Pressure Feed Cup Assemblies

Siphon & Gravity Pressure Feed Cups:

Faster application of viscous materials is possible with pressure fed cups, versus standard siphon or gravity cups. Regulate air pressure in the cup by turning the Control Screw on the **U-3192A** clockwise until desired pressure registers on the cup Gauge **GB-1-1/2"**.

CAUTION: NEVER EXCEED 25 P.S.I., OR USE GLASS CONTAINERS WITH PRESSURE.



BU, CU, D2U, 211 & 300 SPRAY GUNS- 3/8" Fluid Inlet:

52P QUART SIPHON CUP ASSEMBLY– 32 oz. (.946 l)

No.	Part Number	Description
1.	U-992-7	1/8" Tube Assembly
2.	U-3204	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	20SCC	Quart Cup Assembly
	U-3205A	Check Valve Assembly
	U-3192A	Pressure Valve Assembly
	T-02-5/32"	Tubing

53P QUART GRAVITY CUP ASSEMBLY– 32 oz. (.946 l)

6.	U-3182	Cover
7.	3-GT	Gasket
8.	31SCC	Quart Cup and Boss
	U-3205A	Check Valve Assembly
	U-3192A	Pressure Valve Assembly
	T-02-5/32"	Tubing

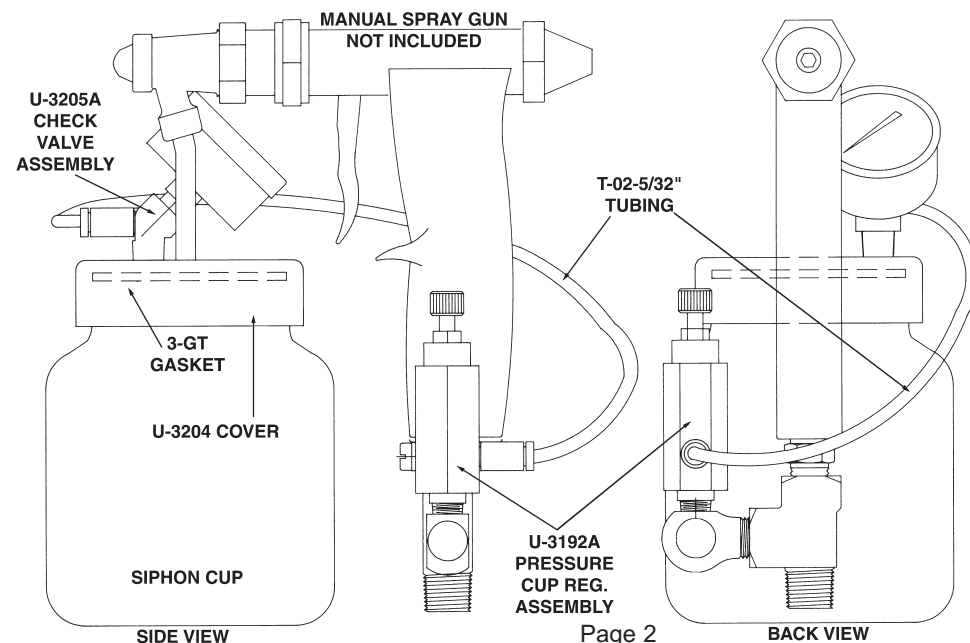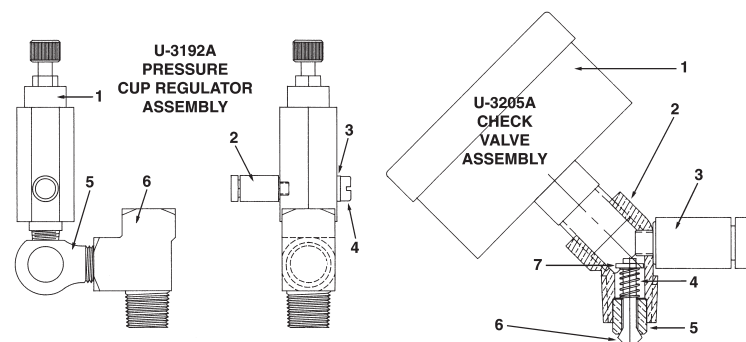

AU SPRAY GUNS with 1/4" Fluid Inlet:

50P QUART SIPHON CUP ASSEMBLY– 32 oz. (.946 l)

No.	Part Number	Description
1.	UA-2398-7-1/4"	Tube Assembly
2.	U-3204	Cover
3.	U-879	Locknut
4.	3-GT	Gasket
5.	20SCC	Quart Cup Assembly
	U-3205A	Check Valve Assembly
	U-3192A	Pressure Valve Assembly
	T-02-5/32"	Tubing

51P QUART GRAVITY CUP ASSEMBLY– 32 oz. (.946 l)


6.	U-3182	Cover
7.	3-GT	Gasket
8.	21SCC	Quart Cup and Boss
	U-3205A	Check Valve Assembly
	U-3192A	Pressure Valve Assembly
	T-02-5/32"	Tubing

U-3192A PRESSURE VALVE ASSEMBLY

1.	R-77	Regulator
2.	3171-04-20	Male Connector
3.	AE-43	"O" Ring
4.	10-32X1/4"R	Rd. Hd. Slotted Mach. Screw
5.	HF-1/4"X1/8"-90	Elbow
6.	HF-342	1/4" 3 Way Tee

U-3205A CHECK VALVE ASSEMBLY

1.	GB-1-1/2"	30 psi Gauge
2.	U-3616	Elbow
3.	3171-04-20	Male Connector
4.	A-105	Spring
5.	U-3188	Check Valve Body
6.	U-3187	Check Valve
7.	U-3189	Split Collar

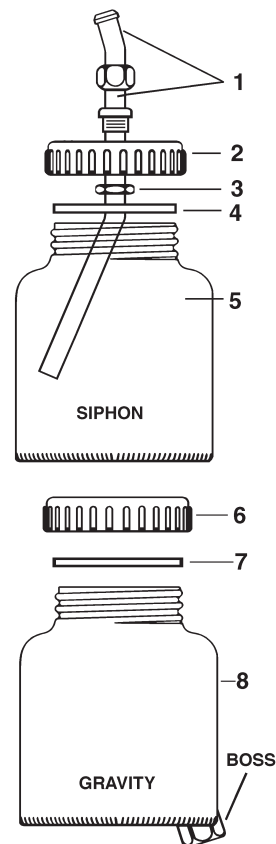


CL-38 CAM-LOCK SIPHON FEED QUART CUP:

CL38 Quart Container Assembly with 3/8" fluid connection is a heavy-duty industrial paint cup with a convenient Cam-Lock cover. Cover is locked or un-locked quickly, with little effort, by simply pushing a lever.

- **AU SPRAY GUNS** have 1/4" fluid connection requiring the HF-58 Adapter.
- **BU, CU, D2U, 211 & 300 SPRAY GUNS** have 3/8" connection and do not require an adapter.

CL38 QUART SIPHON CUP ASSEMBLY– 32 oz. (.946 l)

No.	Part Number	Description
1.	CL38	Cam-Lock Cup Assembly
2.	CLCO38	Cam-Lock Cover Assembly (only)
3.	CLCUP	Cam-Lock Quart Cup (only)
4.	HF-58	3/8"M x 1/4"F Adapter (not shown)

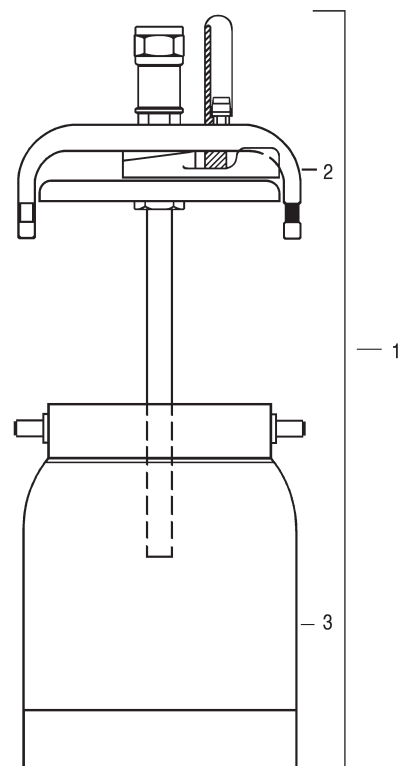


2 oz. Screw Cover Siphon Cup (Aluminum Cup) & Pint Polyethylene Siphon Container


AU & AUT MODEL SPRAY GUNS with 1/4" Fluid Inlet:

26SCC METAL COLOR CUP– 2 oz. (60cc)

No.	Part Number	Description
1.	U-3231	Tube Assembly
2.	N-1/4"	Nut
3.	U-3226	Locknut (2)
4.	U-3560	Cover
5.	3-JG	Gasket
6.	VF-23	Cup

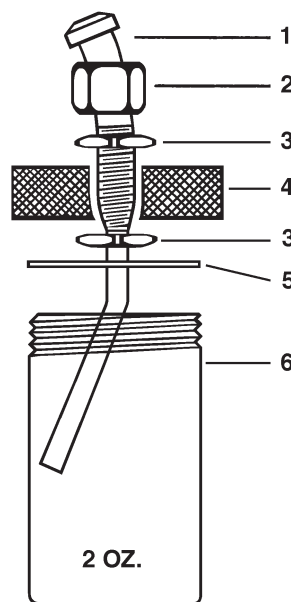

26SCC Siphon Metal Color Cup

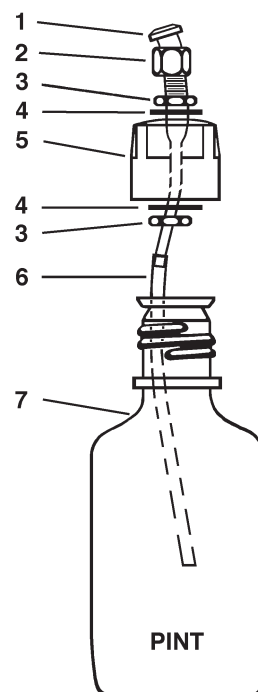

**66-PT Pint Siphon container
(Poly Bottle)**

66-PT PINT SIPHON CONTAINER– 16 oz. (.473 l)

No.	Part Number	Description
1.	U-3231	Tube Assembly
2.	N-1/4"	Nut
3.	U-3226	Locknut (2)
4.	U-3389	Flange (2)
5.	U-3194A	Cap
6.	T-04-1/4"	Polyethylene Tubing (5")
7.	U-3194	Pint Polyethylene Bottle

Screw Cover– Siphon and Gravity Cups:

Cup Assemblies are used for quick change of color on jobs where materials are used in small quantities. Paasche offers cups of many sizes and styles for a wide range of uses.

- AU MODEL SPRAY GUNS have 1/4" fluid Connection.
- All others have 3/8" Fluid Connection.
- Small Airmotor Agitators are available for most aluminum and plastic containers. Call Paasche industrial sales.
- NOTE: Pint cups are not available. Use 1/2 Pint Cups– 8 oz. (.237 l) when required.

AU & AUT SPRAY GUNS with 1/4" Fluid Inlet:

21SC QUART GRAVITY CUP ASSEMBLY– 32 oz. (.946 l)

No.	Part Number	Description
1.	U-2097A	Cover
2.	3-GT	Gasket
3.	21SCC	Quart Cup and Boss

27SC 3 OUNCE GRAVITY CUP ASSEMBLY– 3 oz. (88cc)

9.	UB-255	Cover
10.	4-G	Gasket
11.	27SCC	3 Ounce Cup (only)

20SC QUART SIPHON CUP ASSEMBLY– 32 oz. (.946 l)

4.	UA-2398-7-1/4"	Tube Assembly
5.	UB-1538	Cover
6.	U-879	Locknut
7.	3-GT	Gasket
8.	20SCC	Quart Cup (only)

28SC HALF PINT GRAVITY CUP ASSEMBLY– 8 oz. (.237 l)

1.	U-2097A	Cover
2.	3-GT	Gasket
3.	28SCC	Half Pint Cup and Boss

24SC HALF PINT SIPHON CUP ASSEMBLY– 8 oz. (.237 l)

4.	UA-2398-5-3/4"	Tube Assembly
5.	UB-1538	Cover
6.	U-879	Locknut
7.	3-GT	Gasket
8.	24SCC	Half Pint Cup (only)

BU, CU, D2U, 211 & 300 SPRAY GUNS with 3/8" Fluid Inlet:

31SC QUART GRAVITY CUP ASSEMBLY– 32 oz. (.946 l)

No.	Part Number	Description
1.	U-2097A	Cover
2.	3-GT	Gasket
3.	31SCC	Quart Cup and Boss

30SC QUART SIPHON CUP ASSEMBLY– 32 oz. (.946 l)

4.	U-992-7	1/8" Tube Assembly
5.	UB-1538	Cover
6.	U-879	Locknut
7.	3-GT	Gasket
8.	20SCC	Quart Cup (only)




35SC HALF PINT GRAVITY CUP ASSEMBLY– 8 oz. (.237 l)

1.	U-2097A	Cover
2.	3-GT	Gasket
3.	35SCC	Half Pint Cup and Boss


34SC HALF PINT SIPHON CUP ASSEMBLY– 8 oz. (.237 l)

4.	U-992-6	1/4" Tube Assembly
5.	UB-1538	Cover
6.	U-879	Locknut
7.	3-GT	Gasket
8.	24SCC	Half Pint Cup (only)

3 oz. Gravity Feed Cup

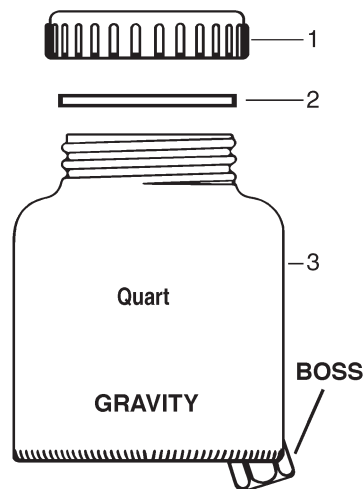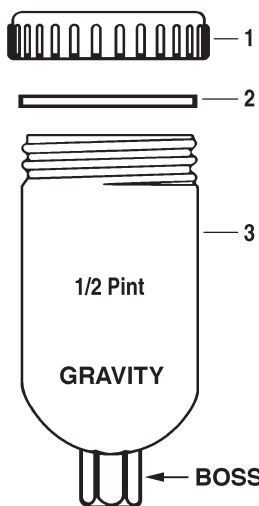

Gravity Cups: Feed color faster and permit close to surface detail work.

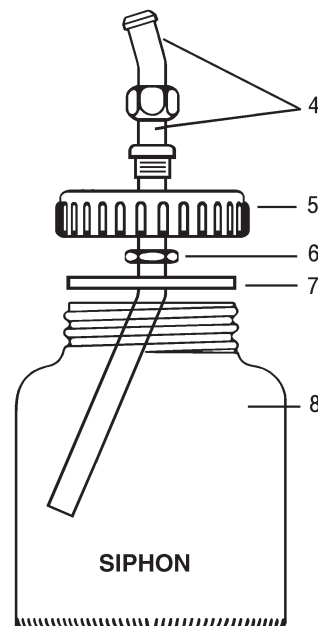

Siphon Cups: For broader coverage where cup is not in the way of the surface to be coated.