

PURE REFLECTIONS


**PR401
2.1 VOC**

PR401 (DTS) Direct to Substrate
High Build Gray Primer 2.1 VOC, Gallon & Quart

PR405 (DTS) Direct to Substrate
Hardener 2.1 VOC, Quart & Half Pint


SPECIAL FEATURES: A two component, Low VOC, Direct to Substrate – Sandable Primer Surfer that can achieve a very high film build through it's high solids/low viscosity technology. A smaller than normal tip size, allows for smoother application and less work when trying to achieve a total flat-sanded surface. This primer also offers excellent sanding characteristics and gloss holdout.

DTS
Direct to
Substrate

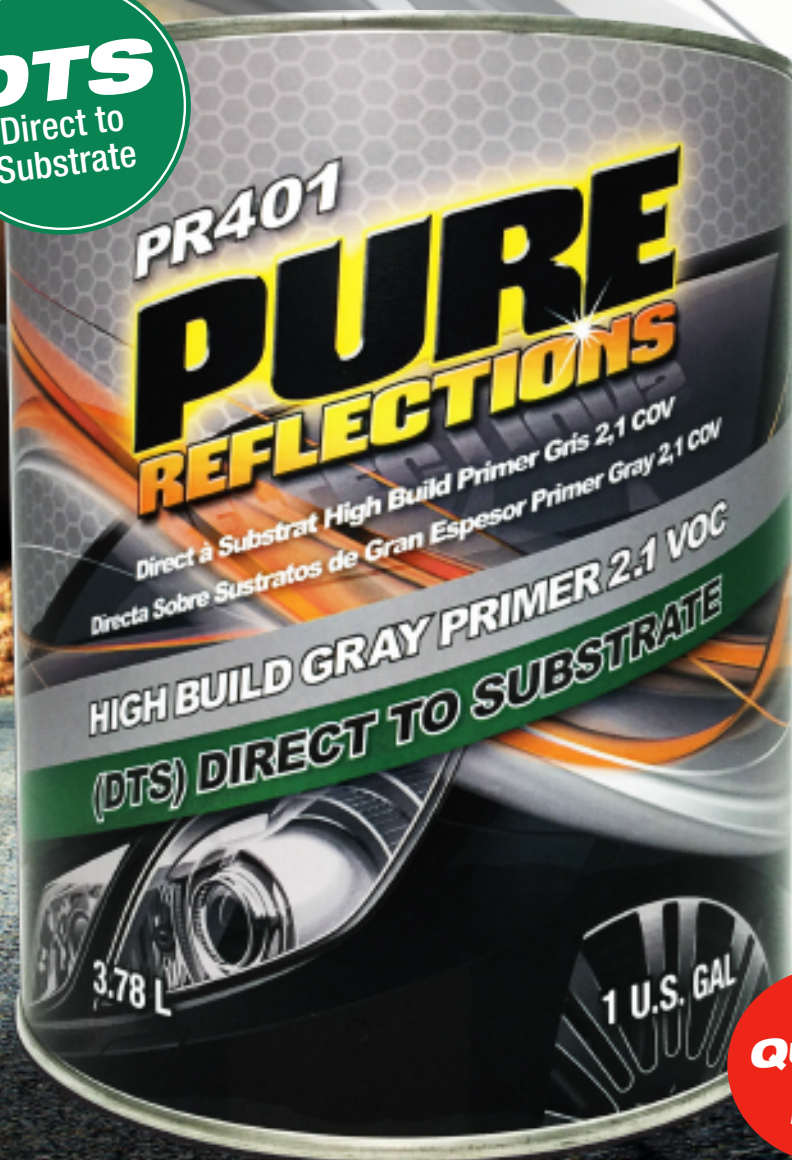

Quarts
NOW
Available!

Substrates - Steel, Aluminum, Fiberglass, SMC, OEM Finishes, Etch Primers, Refinish Lacquers, Enamels and Urethanes and E-Coat (for added corrosion protection).



FOR TECHNICAL ASSISTANCE PLEASE CALL 1-87-BEFINISH (1-877-334-6474)

PURE REFLECTIONS

- ✓ HIGH SOLIDS
- ✓ LOW VISCOSITY
- ✓ HIGH BUILD
- ✓ SMOOTH SAND
- ✓ EXCELLENT GLOSS HOLDOUT
- ✓ ZINC CHROMATE CHARACTERISTICS

Quart Kits Now Available!

**NEW
Sizes**



APPLICATION DIRECTIONS WITH #PR401 PRIMER:
Suggested Air Pressure : 43 psi, no lower than 30 psi

- Air Inlet: 1/4"
- Pattern Width: 8"
- Feed Type: Gravity



- Air Consumption: 8-11 cfm
- Capacity of Cup: 600ml

*Film Build Before Sanding:
3.2-3.4 mil range.


*Film Build After Sanding:
(to complete flat surface)
2.0-2.5 mils.

W98-14G MAXAIR HVLP
Gravity Paint Gun & Cup - 1.4mm

Substrates - Steel, Aluminum, Fiberglass, SMC, OEM Finishes, Etch Primers, Refinish Lacquers, Enamels, Urethanes and E-Coat (for added corrosion protection).



**CHECK OUT THE
APPLICATION VIDEO**



ASK YOUR DISTRIBUTOR TO SEE A SPRAY PANEL.

FOR TECHNICAL ASSISTANCE PLEASE CALL 1-87-REFINISH (1-877-334-6474)